

## JP Price Computing Scales

### General Specifications

• Display	20mm digit LCD display, with white LED backlight
• Capacities	6kg~45kg
• Pan size	240 x 370mm
• Keyboard	25 keys (Mechanical switch)
• Housing	ABS plastic
• Max. Divisions	3,000e; 2 x 3,000e; 6,000d
• ADC update	≤ 1/10 second
• Operating Temp.	-10°C~+40°C
• Power	AC adapter (12V/500mA), internal rechargeable battery (6V/4Ah)
• Gross weight	5.8kg
• Packing	Master carton 4 in 1, gross weight 26kg, dimension 0.213m <sup>3</sup>




- 5 direct PLUs and 99 indirect PLUs
- Applications: 1. Auto unit price clear 2. Accumulation 3. Change 4. Weighing unit conversion
- OIML approval from NMI (approval no.T7441)
- Battery provides up to 70 hours of continuous use (without backlight)
- Optional fruit pan
- Optional RS-232 to connect to computer or printer
- Optional USB interface
- Optional initial-verification



## JP Price Computing Scales

Model Name	Capacity	Readability	Division	Approx. weight	Approval
JP-6K	6kg	1g	6,000d	5.8kg	CE
JP-15K	15kg	2g	6,000d	5.8kg	CE
JP-30K	30kg	5g	6,000d	5.8kg	CE
JP-45K	45kg	10g	6,000d	5.8kg	CE
JP-6K-M	6kg	2g	3,000e	5.8kg	CE, OIML
JP-15K-M	15kg	5g	3,000e	5.8kg	CE, OIML
JP-30K-M	30kg	10g	3,000e	5.8kg	CE, OIML
JP-45K-M	45kg	20g	3,000e	5.8kg	CE, OIML
JP-6K-MR	6kg	1g/2g	2 x 3,000e	5.8kg	CE, OIML
JP-15K-MR	15kg	2g/5g	2 x 3,000e	5.8kg	CE, OIML
JP-30K-MR	30kg	5g/10g	2 x 3,000e	5.8kg	CE, OIML
JP-45K-MR	45kg	10g/20g	2 x 3,000e	5.8kg	CE, OIML

### Options

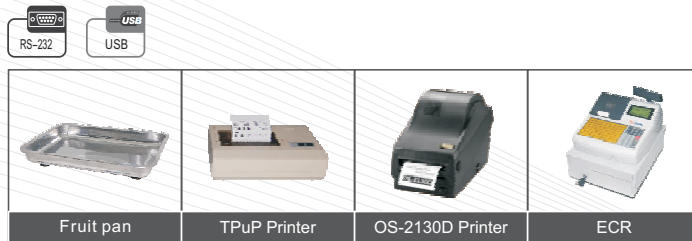

### Print formats



### Dimensions(mm)

